


splash waterproof holder series 2005, normOTO fuse

- 1.5 mm² black or 2.5mm² red cable, 235mm each side
- Box-type phosphor bronze CuSn fuse receptacles
- Splash waterproof with cover (IP56)
- Self-extinguishing body and cover materials

EML ref.	Cable	Cable Color	Note
CBL 2005 N8	1.5mm ²	Black	includes Cover
CBL 2005 N9	2.5mm ²	Red	includes Cover

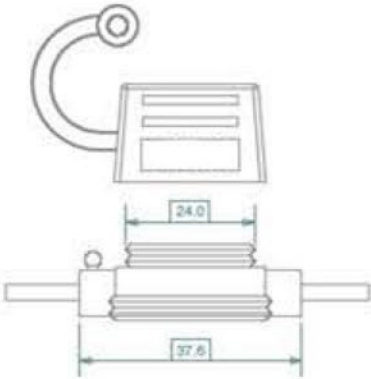

	1	2	3	4	
A					A
B					B
C	<p>CBL 2005 N8 cable 1.5mm², thin wall insulation black, 230 ± 10mm each side, total length 500 ± 20mm, for use with F1000 series up to 20A</p> <p>CBL 2005 N9 cable 2.5mm², thin wall insulation red, 230 ± 10mm each side, total length 500 ± 20mm, for use with F1000 series up to 30A</p>		<p>Notes 2005 series holder:</p> <p>Cover can be attached using tether to:</p> <ol style="list-style-type: none">1. cable (prior to connecting cable): slip ring around cable2. fuse holder body: press ring over ball joint <p>Materials:</p> <p>fuse holder body: PUR UL94-V0</p> <p>fuse holder cover: Forprene, UL94-V0</p> <p>fuse holder contacts: Phosphor bronze, box type</p>		C
D					D
E					E
F					F
	1	2	3	4	

Elettromeccanica
Lombarda S.r.l.

CBL|2005|N8 - CBL|2005|N9
series normOTO fuse holder schematic
CBL|2005|N8 - CBL|2005|N9 drawing 1
1 of 1
0 1 2 6 8 9 10 11 Sheet 01